


HELLFIRE MISSILE POWER SUPPLY

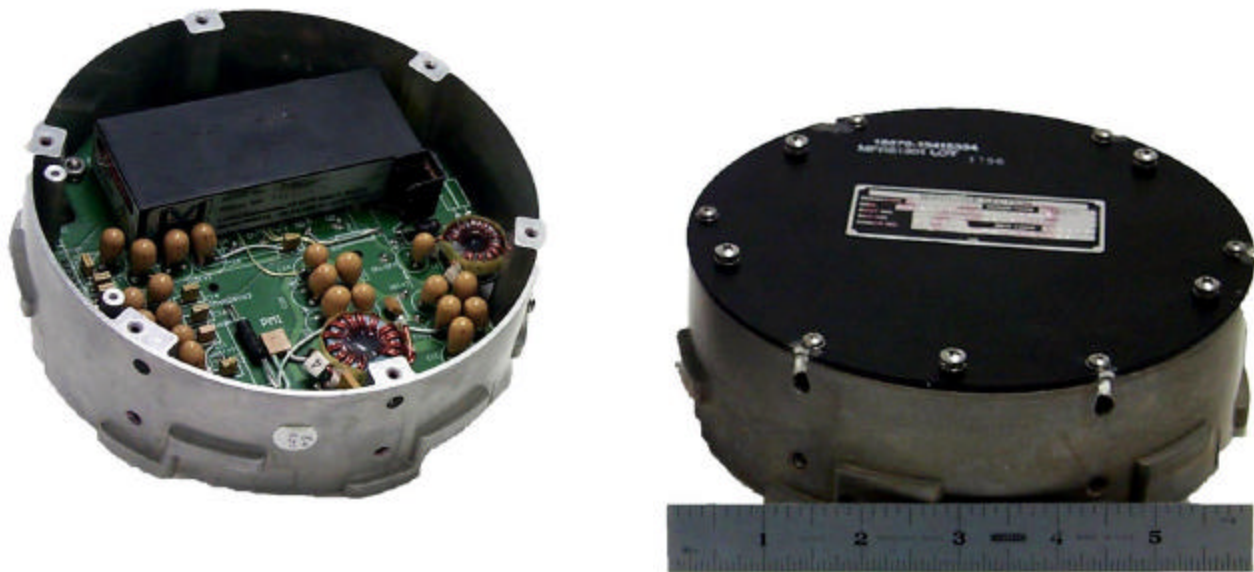

FEATURES:

- Standard COT's Design
- Six Outputs: +5V @ 1A, $\pm 15V$ @ 0.75A, $\pm 28V$ @ 3A, -200V @ 0.06A
- Missile Environment
- High Shock, Vibration
- -40 °C to +65 ° Operation
- MIL-STD-810; MIL-STD-461